

Wall Mounted Luminaire

Circular IP65 bulkhead with white bezel trim accessory included.

Direct replacement for 1x16W 2D. More than 40% energy savings compared with luminaires with CFL lamps. Frosted diffuser ensuring homogeneous light effect and visual comfort.

Sealed to IP65 for protected exterior applications. Robust construction tested up to IK08 impact resistance.

Materials:

Body: Polycarbonate, black (RAL 9011)

Diffuser: Polycarbonate, opal

Complete with 4000K LED, 1000lm. Class II electrical, IP65, IK08.


Luminaire efficacy: 80 lm/W

Rated median useful life: 50.000h L70B50 at 25°C

Weight: 1.3 kg




TE\_LARA\_F\_300\_RING\_WH.jpg

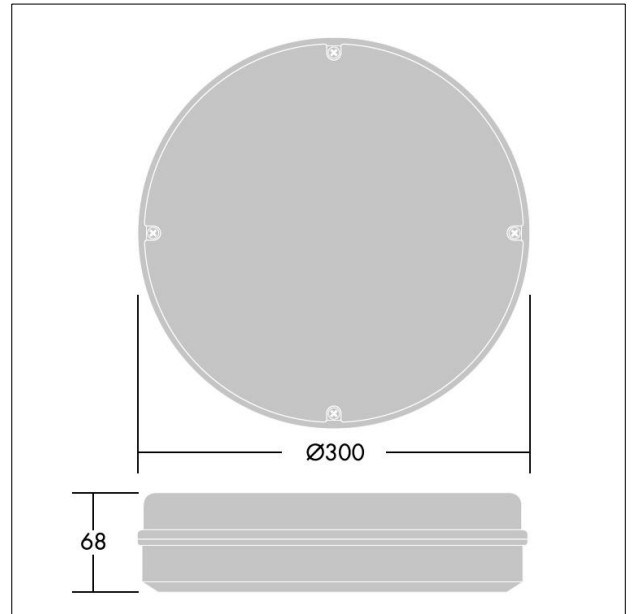

TE\_LARA\_M\_1200L.wmf

Light Distribution

STD - standard

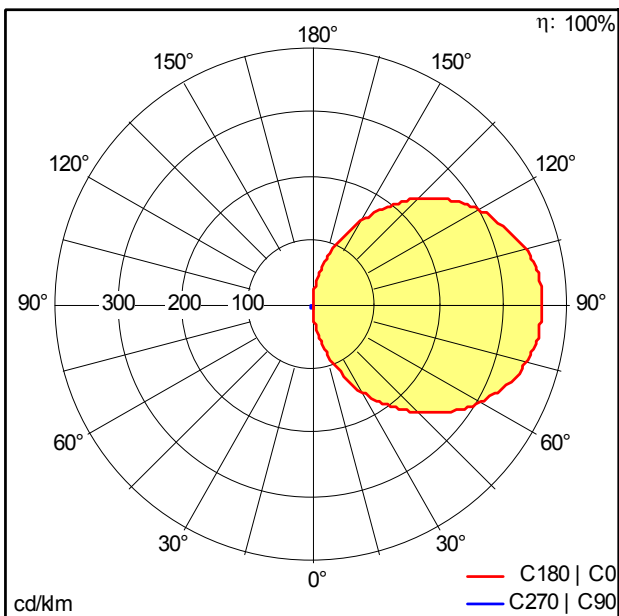

TE\_LARA\_LED\_300\_1000\_840\_BEZEL\_TRIM\_WH.Idt

- Light Source: LED
- Luminaire luminous flux\*: 1000 lm
- Luminaire efficacy\*: 77 lm/W
- Colour Rendering Index min.: 80
- Correlated colour temperature\*: 4000 Kelvin
- Chromaticity tolerance (initial MacAdam)\*: 4
- Rated median useful life\*: 50000h L70 at 25°C
- Ballast: 1x LED\_Con
- Luminaire input power\*: 13 W Lambda = 0.55