

PRELUX

LED OFFICE PENDANT RANGE

New Moon

Up/Down

4000K

LINEAR LED
PENDANT

PXNEWM



1275lm

15W
Up

2975lm

35W
Down

Now Available from Trade Electric Group

Ask in-store about our Prelux LED range of fittings

 **Trade Electric Group**
Electrical & Lighting Distributors



LIMERICK

Tel: 353 (0)61 417754
Email: sales@trade-electric.ie

WATERFORD

Tel: 353 (0)51 591666
Email: waterford@trade-electric.ie

KILKENNY

Tel: 353 (0)56 7762498
Email: kilkenny@trade-electric.ie

DUBLIN (NORTH)

Tel: 353 (0)1 8426055
Email: santry@trade-electric.ie

NEWCASTLE WEST

Tel: 353 (0) 69 77971
Email: ncw@trade-electric.ie

WEXFORD

Tel: 353 (0)53 9147150
Email: wexford@trade-electric.ie

NENAGH

Tel: 353 (0)67 31289
Email: nenagh@trade-electric.ie



DUBLIN (SOUTH)

Tel: 353 (0)1 5631830
Email: stillorgan@trade-electric.ie

New Moon Datasheet

15W Up / 35W Down Linear LED Pendant

PXNEWM

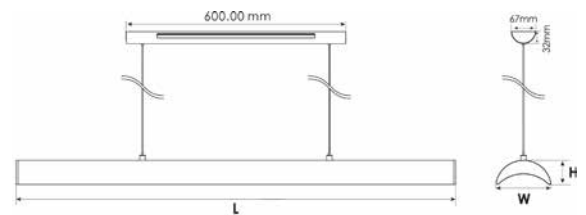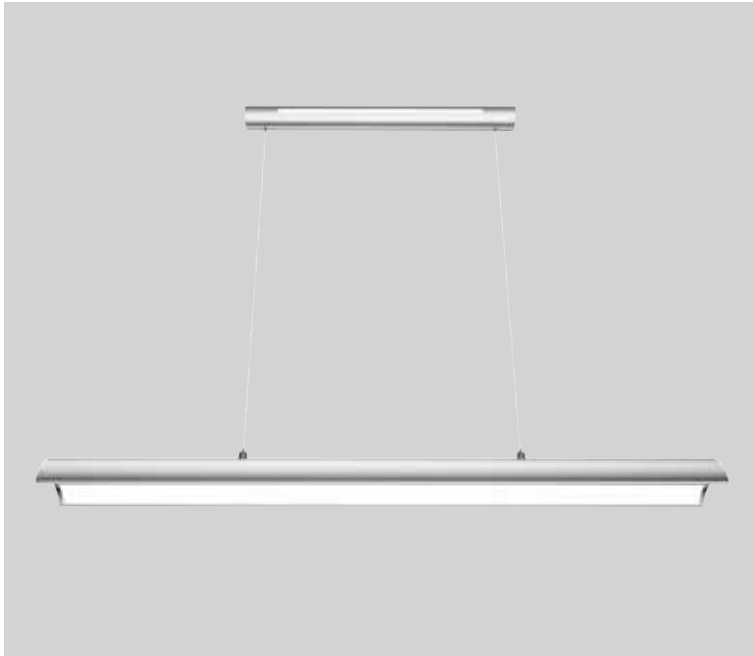

L*W*H=1200*150*66



Dimensions	1200*150*66mm
Input Voltage	AC100~240V/AC220~240V
Input Power	↑ 15W Up ↓ 35W Down
Power Factor	≥0.9
Housing Color	Silver/White
Luminous Flux	↑ 1275lm Up ↓ 2975lm Down
Color Rendering Index	>80
Life Time	50,000H
Fixture Material	6063AL
CCT	4000K
LEDs	↑ 120pcs Up ↓ 240pcs Down
Protection Level	IP 20
Storage Temperature	-40°C~+80°C
Working Temperature	-20°C~+45°C
UGR	<19
Dimmable	No
Luminous Efficacy	85lm/W
Warranty	5 Years

Features & Applications

The Prelux New Moon Pendant is an elegant and versatile fitting suitable for a range of commercial, retail and architectural spaces.

The crescent shaped frame is crafted from high quality die cast aluminium for superb thermal dissipation, adding to the long 50,000 hour lifetime of the LEDs.

New Moon provides a soft even light with a low UGR of <19, while the 15W uplight and 35W downlight create an ambient atmospheric glow making New Moon ideal for public buildings, retail stores and commercial offices.