



PRESTIGE 3D COMPACT

RANGE INTRODUCTION

Prestige 3D Compact completes the 3D offering with all the 3D benefits of faster installation, Cat 5e, 6 and 7 compliance and improved aesthetics, but in a smaller footprint & ideal for confined locations.

The new concept uses the full trunking depth with a sliding open box (frame) principle to ease power and data connections.

HOW TO SPECIFY

A range of compact 3 compartment Dado and Skirting manufactured from recycled PVCu, designed with a curved covers to compliment MK Logic Plus accessories. Cat 5e, 6 and 7 compliant on all Tees, Angles, Internal and External corners utilising data sweeps that ensure no loss of capacity without the need for bulky protruding covers. Products to have pre-punched bases and divider knockouts at 100mm intervals to facilitate easy installation without the need for drilling and cutting.

FEATURES & BENEFITS

CAT5E, 6 & 7 COMPLIANT

Flexible Internal and External Corners, moulded Flat Angles and Tees

TOOL FREE CABLE ENTRY

Unique 'open box' mounting frames combined with divider knockouts to provide unhindered tool-free cable entry

MAXIMISES CAPACITY

Innovative External Corner Data Sweep allows continuous cable capacity and maintains the minimum trunking depth

PRE-DRILLED TRUNKING BASES

Eliminates the need to measure and drill fixing holes on site thus reducing installation time

HINGED LID

Mounting frames for LJU6/Euro data outlets to maximise use of space

STYLISH AND ROBUST


Curved outer covers that complement MK Logic Plus accessories

MADE FROM 100% RECYCLED PVCu*

10 YEAR GUARANTEE

*Based on 2014 consumption



Prestige 3D Compact




DIVIDER KNOCKOUTS
Wiring is also made easy with 50mm x 21mm knockouts at 100mm intervals along compartment dividers, providing instant access to mounting boxes with no drilling or cutting.

MOUNTING FRAMES


1 gang and 2 gang 'open box' mounting frames use the full trunking depth allowing ease of connection to power and data devices. The open top/bottom allows unhindered tool free cable entry through the trunking compartment divider knockout. The frame can slide to align with appropriate knockout.



END CAPS
Neatly finishes runs of trunking. Moulding provides internal location for extra security from optional screw fixing.

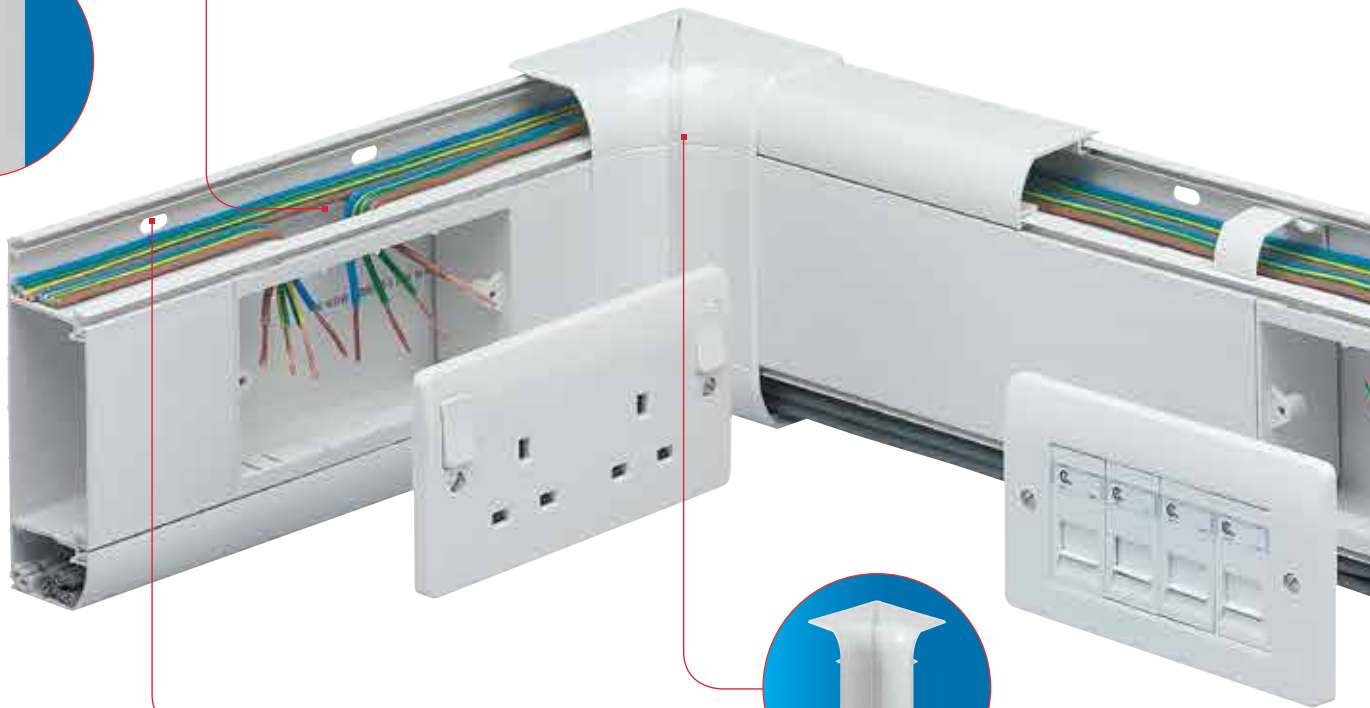

PRE-PUNCHED BASES
Wall fixing is simplified by the inclusion of pre-punched oval holes at 100mm intervals, ensures no drilling is required.



INTERNAL CORNER
Designed to accommodate irregularities in the squareness of the corner with a +/- 5 degree flexibility range. The centre split gives maximum adjustment. Covers are radiused and compatible with Cat 5e, 6 and 7 data cabling requirements.



SCREW FIXING KIT
Where higher security is required, all fitting covers can be secured using the Screw Fixing Kit. The Screw Fixing Kit is self-locating on the styling line of the system and has a cover to hide the screw head.



Technical Hotline
+44 (0)1268 563720

Prestige 3D Compact



FLAT TEES AND ANGLES

The ingenuity of the patented tee design allows a variety of cable drop permutations. The tee's bridge can be fitted in two positions increasing the versatility of cable runs whilst maintaining the correct segregation and Cat 5e, 6 and 7 compliance. Screw fixing hole locations have a protective shroud to prevent the chafing of cables.


Both the Flat Angle and Tee compartment divider walls are curved (Cat 5e, 6 and 7 compliant) to allow data cables to lay in with no loss of capacity. The covers are one piece and clip securely into place, and the base is also a single moulded item, giving more strength than fabrication. Joint covers are not required where the tee/angle meets the trunking as the moulded covers now overlap the junction.

ELECTROMAGNETIC INTERFERENCE

Additional data cable/signal protection is provided by fitting screening divider VCT30.

STYLING LINES

All fittings are moulded with styling lines for aesthetic continuity.




TRUNKING HINGED LIDS

A patented two stage location gives a hinge effect, enabling cables to be supported by the trunking cover during the installation. Cover design avoids dust traps and makes cleaning easier and continues the aesthetics of the trunking.




EXTERNAL CORNER

External Corners accommodate +/- 5 degree irregularities in the squareness of a corner. Corners come ready assembled to click into place, and offset side splits hide the effect of the split line for aesthetics.



DATA SWEEP


The unique patented Data Sweep provides Cat 5e, 6 and 7 data cabling compliance, with no loss of capacity and without the need for bulky, protruding corner covers.



CHOICE OF TWO PROFILES

Available in Dado and Skirting profiles to suit most installations.

Available in white and charcoal.




Prestige 3D Compact

Profile Lengths

Component Selector Chart	Main Carrier	Extension Carrier	Straight Cover	Curved Cover	Extension Cover
---	-------------------------	------------------------------	---------------------------	-------------------------	----------------------------

3 METRES 6m	3 METRES 15m	3 METRES 30m	3 METRES 30m	3 METRES 15m
------------------------	-------------------------	-------------------------	-------------------------	-------------------------

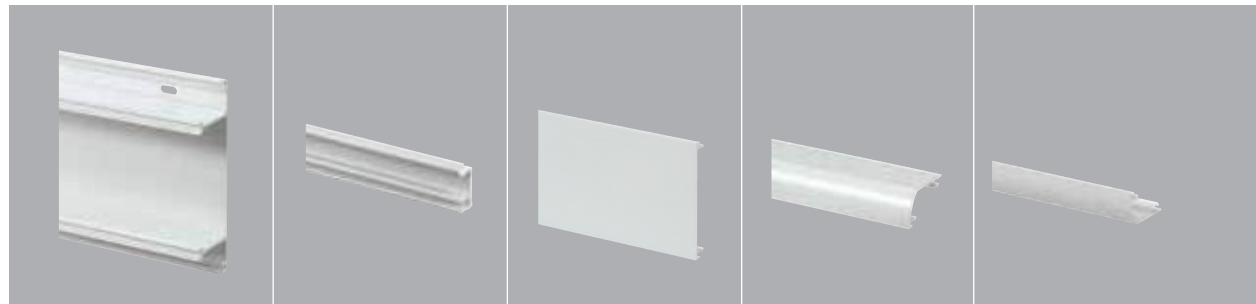

VCT140WHI

VCT100WHI

VCT110WHI X2



VCT140WHI

VCT160WHI

VCT100WHI

VCT110WHI

VCT120WHI



Technical Hotline
+44 (0)1268 563720

Prestige 3D Compact

CABLE MANAGEMENT
PERIMETER AND
DISTRIBUTION

Fittings

Flexible Internal Corner

2

Flexible External Corner

CONSISTS OF COVER AND DATA SWEEP

2

End Cap

SUPPLIED AS PAIR OF LEFT AND RIGHT-HAND END CAPS

2

Joint Cover

Flat Angle Up

5

CONSISTS OF COVER AND CARRIER

Flat Angle Down

2

CONSISTS OF COVER AND CARRIER

Flat Tee

2

CONSISTS OF COVER AND CARRIER

1



VCT141WHI

VCT142WHI

VCT143WHI

VCT144WHI

VCT145WHI

VCT145WHI

VCT147WHI

VCT161WHI

VCT162WHI

VCT163WHI
(2X L/R PAIRS)

VCT164WHI

VCT165WHI

VCT166WHI

VCT167WHI
(UP ONLY)

Prestige 3D Compact



Accessories

Socket Spacer

Part M Flange and Socket Spacer

Open Mounting Frames

Screening Divider

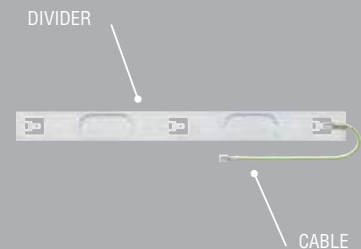

VCT25WHI
SOCKET SPACER

10

Visible width is 9mm after installation.

VX40CHA
VX40BLU
PART M FLANGE FITTED
BOTH SIDES OF A DEVICE
VX41CHA
VX41BLU
PART M SOCKET SPACER

20

20

10

10

Provides colour contrast with wiring device to comply with Part M.
Visible width is 25mm after installation.

VCT121WHI
1 GANG 40MM
OPEN MOUNTING FRAME
VCT122WHI
2 GANG 40MM
OPEN MOUNTING FRAME

25

10

Wings may be removed for increased wiring space.

VCT30*
1.5M SCREENING DIVIDER
VX31
300MM SCREEN CONNECTING CABLE

15m

10

* Cable not included

Adaptors

SUITABLE FOR 20 AND 25MM CONDUIT AND YT2 AND YT4 MINI-TRUNKING. CONSISTS OF COVER AND CENTRE COMPARTMENT CABLE BRIDGE

Cable Retainer

Screw Fixing Kit

MCB/RCD Housing



VCT148WHI
FOR USE WITH COVER VCT110WHI

10

VCT105WHI
CABLE RETAINER

50

VTS1000
SCREW FIXING KIT

20

VCT35WHI
MCB/RCD HOUSING WITH COVER
(ACCESSORY NOT SUPPLIED)

1

Mounts directly to central compartment of trunking to accept up to 2 x one module products from the Sentry range of MCBs and RCDs (excluding one module RCBOs).